

# BK-G4 and BK-G4T

High quality residential diaphragm gas meters



## Applications

Media: Natural gas, town gas, propane, butane air \*  
Industry: Gas supply  
Tasks: BK-G4 - gas measurement at operating conditions\*\*

## Brief information

The residential diaphragm gas meter BK-G4 meet the highest demands with respect to accuracy of measurement and safety. It incorporates both innovative features and gas measurement know-how of many decades. The BK-G4 is supplied in folded form as co-axial and two-pipe version.

The stroke of the diaphragms is pneumatically stopped and therefore ensures both low bearing loads and a quiet operation.  
The synthetic diaphragm is dimensionally stable and stadium shaped.

High-grade materials and components as well as the patented curve K-System ensure a high quality standard.

The K-System perfectly coordinates the movement of the valves with the actual gas flow to the measuring chambers. This ensures excellent linearity even with utilizing small valves.

Due to the optimised slides,  $Q_{\min}$  of BK-G4 is stable and the gas meter is not susceptible to contamination (RPF 0.65 to BS4161). The measuring unit is adjusted by a patented needle-and-scale system.

Although the design of the BK-G4 is very robust, the gas meters are still measuring instruments and as such should be handled with care.

Operating principle: Four measuring chambers are separated by synthetic diaphragms. The chambers are filled and emptied periodically, and the movement of the diaphragms is transferred via a gear to the crankshaft. This shaft moves the valves, which control the gas flow. The rotations of the gear are transferred via a magnetic coupling to the index.

The temperature compensation facility of the BK-G4T ensures via a bimetallic element that the stroke of the diaphragms is adapted to the current gas temperature.

## Main features


- MID conformity approved by PTB
- Approved to EN 1359 by German DVGW
- EU Approval by German PTB
- Flow rates from 0.04 m<sup>3</sup>/h to 6 m<sup>3</sup>/h
- Cyclic Volume 2 liters
- Firesafe (HTB) up to 0.1 bar according to EN 1359
- Maximum working pressure 0.5 bar
- High accuracy and long-term stability
- Powder coated pale grey to RAL 7035
- Standard pulse magnet; retrofitable LF pulser (I=0.01 m<sup>3</sup>/pulse)
- Not susceptible to contamination (RPF = 0.65)
- Temperature range:  
Standard: -10 °C to +40 °C,  
other temperatures on request
- Temperature compensation available
- Intelligent index technology, Chekker system, Absolut-ENCODER and radio applications

\* Other media: Inert gases to EN 437

\*\*BK-G4T: Measurement of temperature compensated gas volume.

# BK-G4 and BK-G4T: High quality residential diaphragm gas meters

## Dimensions and weights

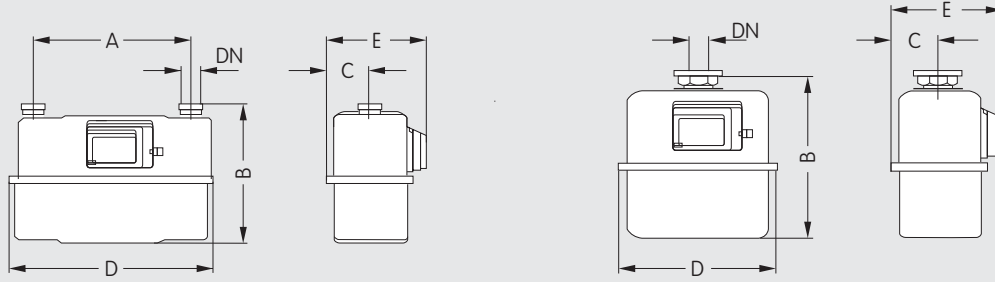


Type	Dimensions**					Diameter nominal DN*	Thread	Weight kg
	A	B	C	D	E			
Two-pipe	152.4	262	71	226	163	-	1" [BS 746]	3.0
Two-pipe	220	250	71	327	163	-	GM 3/4	3.5
Two-pipe	250	241	71	327	163	25	1 1/4"	3.5
Co-axial	-	251	71	226	163	25	2"	3.0

\* according to DIN 3376

\*\*additional connection dimensions on request


## Error curve BK-G4 and BK-G4T

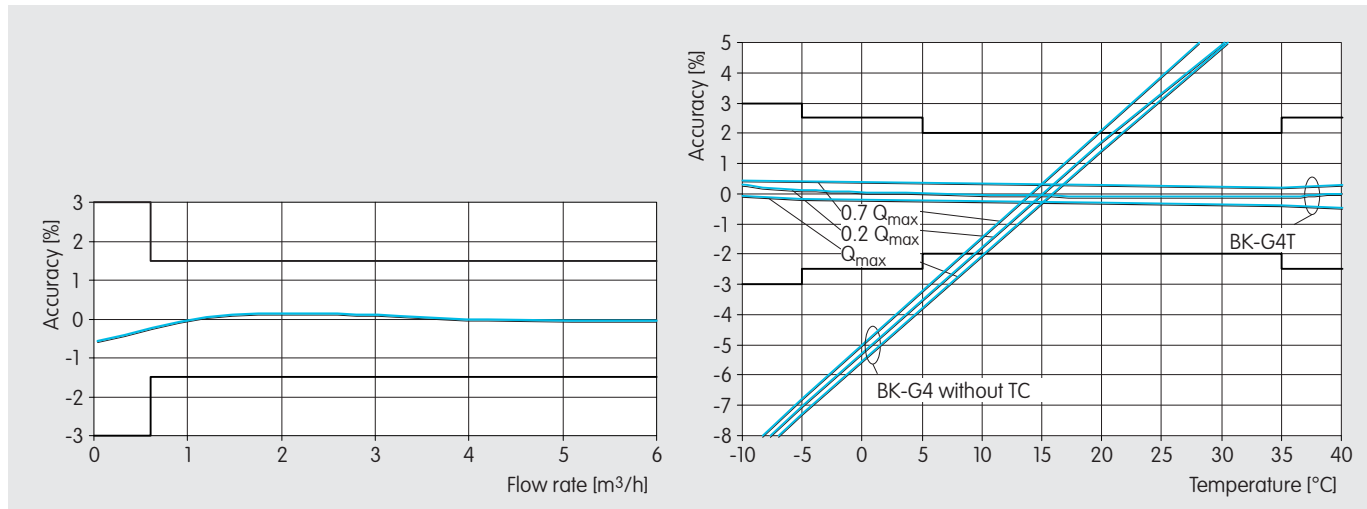

BK-G4 with calibration error limits at test room temperature according to MID and EN 1359

For BK-G4T within the compensation range with error limits to MID and EN 1359:1998/A1:2006, Annex B

## Pressure drop curve BK-G4 and BK-G4T

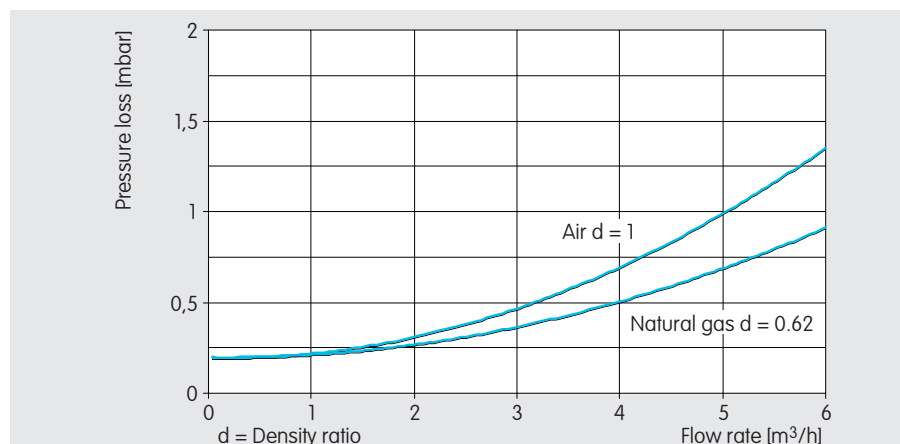

## Your contacts

Germany  
Elster GmbH  
Steinern Str. 19 - 21  
55252 Mainz-Kastel  
T +49 6134 605 0  
F +49 6134 605 223  
www.elster-instromet.com  
info@elster-instromet.com

Belgium  
Elster-Instromet N.V.  
Rijkmakerlaan 9  
2910 Essen  
T +32 3 670 0700  
F +32 3 667 6940  
www.elster-instromet.com  
info@elster-instromet.com

Singapore  
Elster-Instromet Sdn. Bhd. (Singapore Branch)  
29 Tai Seng Avenue  
#06-05A Natural Cool Lifestyle Hub  
Singapore 534119  
T +65 6247 7728  
F +65 6848 9003  
sales@elster-instromet.com.sg

BK G4 EN05

A08.08.2011

73030002

All rights reserved

Subject to change without prior notice