


DRY RISER INLET VERTICAL CABINETS & SYSTEM



PART NUMBER:10905502
DRY RISER INLET VERTICAL
MATERIAL:16SWG ZINTEC
STEEL
FINISH:RED RAL3002
BACK BOX DIMENSIONS:
595mmHigh x 395Wide x 295
Deep
MINIMUM APERTURE: 405mm
Wide x 605 High X 305 Deep

Air Release Valves
LK15140:(3/4" Auto Air Release Valve)
LK15141:(1" Auto Air Release Valve)

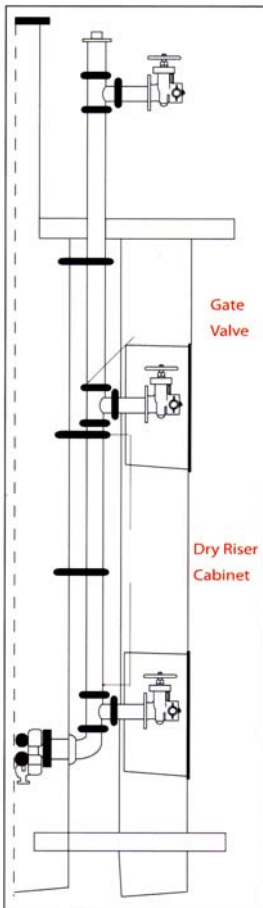


PART NUMBER:10905506
DRY RISER INLET VERTICAL
MATERIAL:16SWG ST. STEEL
SATIN POLISHED
BACK BOX DIMENSIONS:
595High x 395Wide x 295 Deep
MINIMUM APERTURE : 405mm
Wide x 605 High X 305 Deep



An inlet breeching at ground level provides the connection to the water supply. The system is normally dry and is charged by the fire brigade in an emergency. Breeching inlets have either 2 or 4 inlet connections complete with 2.5" male instantaneous

inlets to BS336 fitted with non-return valves, 1" drain valve and caps and chains. A 100mm (4") rising main uses a 2-way inlet breeching in a vertical or horizontal position. A 150mm (6") rising main uses a 4-Way inlet breeching. Inlet Breechings comply with the requirements of BS 5041 Part 3. The Breechings are normally housed in inlet cabinets, normally recessed into the external wall of the building in a vertical or horizontal position, 4 -way breechings in a square inlet breeching cabinet, manufactured in accordance with BS 5041 Part 5. Cabinets for foam inlets are available on request. **RECOMMENDED MOUNTING 750mm FROM FLOOR TO VALVE CENTRE**

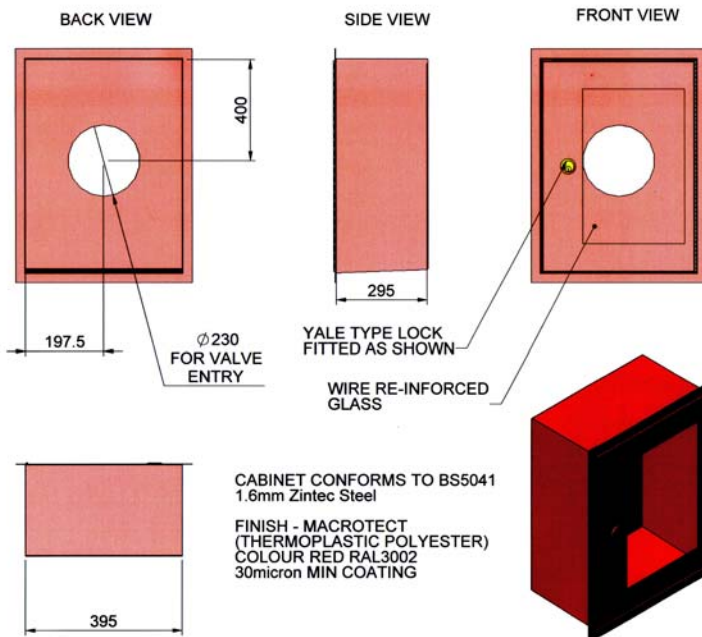

2 WAY INLET BREECHING VALVE TO BS336 COMPLETE WITH NON-RETURN VALVES BLANKING CAPS AND CHAIN

LK15133:(2 WAY INLET BREECHING 4" FLANGED OUTLET BS10 TABLE D)
LK15134:(2 WAY INLET BREECHING 4" BSP OUTLET)
LK15135:(2 WAY INLET BREECHING 100mm FLANGED OUTLET PN16)

Typical Arrangement Dry Rising Main

