

Energy Management Energy Meter Type EM110

CARLO GAVAZZI



- Single phase energy meter
- Class 1 (kWh) according to EN62053-21
- Class B (kWh) according to EN50470-3
- Electro-mechanical display
- Energy readout on display: 6+1 digit
- Measurements on display: total kWh
- Direct current measurement up to 45AAC
- Self power supply
- Dimensions: 1-DIN module
- Protection degree (front): IP51
- Pulse output (by open collector PNP)
- Detects wrong current direction


Product description

Single-phase energy meter with electro-mechanical data displaying; particularly indicated for active energy metering and for cost allocation in applications up to 45 A (direct connection), especially when energy reading is necessary during power down. Housing for DIN-rail mounting, with IP51 front degree protection. The meter is provided with pulse output proportional to the active energy being measured.

STANDARD

Not certified according to MID Directive. Cannot be used for fiscal (legal) metrology.

How to order **EM110-DIN AV8 1 X 01 X**

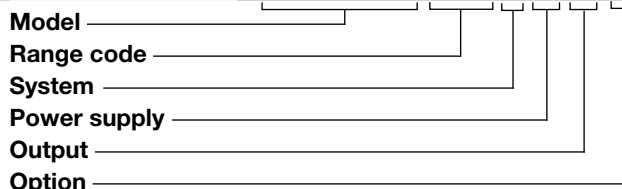

Type Selection

Range code	System	Power supply	Output
AV8: 230VLN AC - 5(45)A (Direct connection)	1: 1-phase 2-wire	X: Self power supply -30% +20% of the rated measuring input voltage, 45 to 65Hz	O1: pulse output
AV7: 120VLN AC - 5(45)A (Direct connection)			

Option

X: none

Input specifications

Rated Inputs		Resolution	
Current type	1-phase loads, direct connection	Energy	0.1 kWh
Current range	5(45)A	Energy additional errors	
Nominal voltage	230VLN AC (AV8 option), 120 VLN (AV7 option)	Influence quantities	According to EN62053-21
		Temperature drift	≤200ppm/°C
		Sampling rate	4096 samples/s @ 50Hz 4096 samples/s @ 60Hz
Accuracy (@25°C ±5°C, R.H. ≤60%, 45 to 65 Hz)		Display	
AV7	I _{min} =0.25A; I _b : 5A, I _{max} : 45A; U _n : 120VLN -30% +30%	Type	Electro-mechanical, h 5 mm
AV8	I _{min} =0.25A; I _b : 5A, I _{max} : 45A; U _n : 230VLN -30% +20%	Energies read-out	Total: 6+1 digit Only positive energy is integrated
Current (AV7, AV8)	From 0.04I _b to 0.2I _b : ±(0.5%RDG+1DGT) From 0.2I _b to I _{max} : ±(0.5%RDG)	Max. and Min. indication	Max. 999 999.9 Min. 0.0
Phase-neutral voltage	In the range U _n : ±(0,5% RDG)	LEDs	Flashing red light pulses according to EN50470-3, EN62052-11, 1000 imp./ kWh (min. period: 90ms) Fix orange light: wrong current direction
Frequency	Range: 45 to 65Hz.	Current overloads	
Active power	From 0.05 I _n to I _{max} , within U _n range, PF=1: ±(1% RDG) From 0.1 I _n to I _{max} , within U _n range, PF=0.5L or 0.8C: ±(1% RDG)	Continuous	45A, @ 50Hz
Power factor	±[0.001+1%(1.000 - "PF RDG")]	For 10ms	1350 A
Reactive power	From 0.05 I _n to I _{max} , within U _n range, sinphi=1: ±(2% RDG) From 0.1 I _n to I _{max} , within U _n range, sinphi=0.5L or 0.8C: ±(2% RDG)	Voltage Overloads	
Energies	Class 1 according to EN62053-21	Continuous	1.2 U _n
Start-up current:	20mA (AV7, AV8) Self-consumption is not measured.	For 500ms	2 U _n
Start-up voltage	84V (AV7), 161V (AV8)	Input impedance	
		Voltage input 230VL-N	> 750 Kohm
		Voltage input 120VL-N	> 750 Kohm
		Current inputs: 5(45) A	< 0.5 VA

Output specifications

Static output	For pulse output proportional to the active energy (kWh) 1000 kWh per pulse	Pulse ON duration	30ms, according to EN62052-31 open collector PNP V_{ON} 1 VDC; max. 100 mA V_{OFF} 80 VDC max
Purpose		Output type Load	
Pulse rate			

General specifications

Operating temperature	-25 to +65 °C, indoor, (R.H. from 0 to 90% non-condensing @ 40°C)	Standard compliance	Safety Metrology	EN62052-11 EN62053-21, EN50470-3
Storage temperature	-30°C to +80°C (R.H. < 90% noncondensing @ 40°C)	Approvals		CE
Installation category	Cat. III	Connections	Cable cross-section area	Measuring inputs: 6 mm ² , with/without metallic cable ferrule; Max. screw tightening torque: 1.1 Nm 1.5 mm ² , Min./Max. screws tightening torque: 0.4 Nm
Insulation (for 1 minute)	4000 VAC RMS between measuring inputs and digital/serial output (see table) 4000 VAC RMS		Other terminals	
Dielectric strength	4000 VAC RMS for 1 minute	Housing	Dimensions (WxHxD) Material	17.5 x 63 x 90 mm Noryl, self-extinguishing: UL 94 V-0
EMC	According to EN62052-11	Sealing covers		Included
Electrostatic discharges	15kV air discharge;	Mounting		DIN-rail
Immunity to irradiated	Test with current: 10V/m from 80 to 2000MHz;	Protection degree	Front	IP51
Electromagnetic fields	Test without any current: 30V/m from 80 to 2000MHz;	Screw terminals (cable inputs)		IP20
Burst	On current and voltage measuring inputs circuit: 4kV	Weight		Approx. 75 g (packing included)
Immunity to conducted disturbances	10V/m from 150KHz to 80MHz			
Surge	On current and voltage measuring inputs circuit: 4kV;			
Radio frequency	According to CISPR 22			

Power supply specifications


Self power supply		Power consumption	≤1.0W, ≤ 8VA
AV8	230VAC VL-N, -30% +20% 50/60Hz		
AV7	120VAC VL-N, -30% +30% 50/60Hz		

Insulation (for 1 minute) between inputs and outputs



	Measuring input	Auxiliary power supply	Digital output
Measuring input	-	0 kV	4 kV
Auxiliary power supply	0 kV	-	4 kV
Digital output	4 kV	4 kV	-

Accuracy according to EN50470-3


kWh, PF=accuracy (RDG) depending on the current

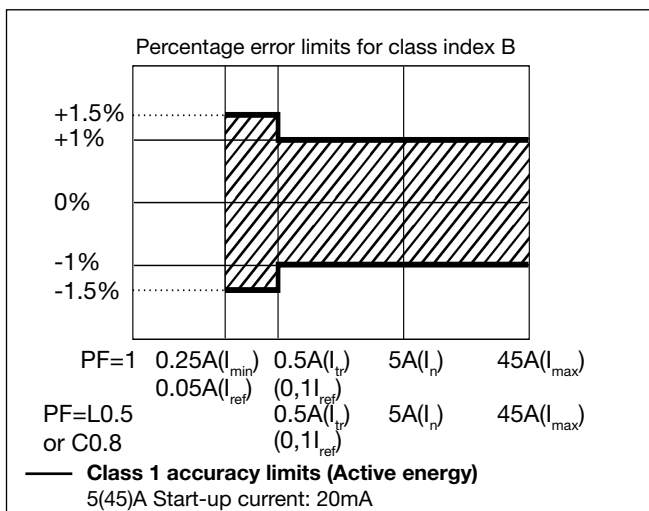

Wiring diagrams

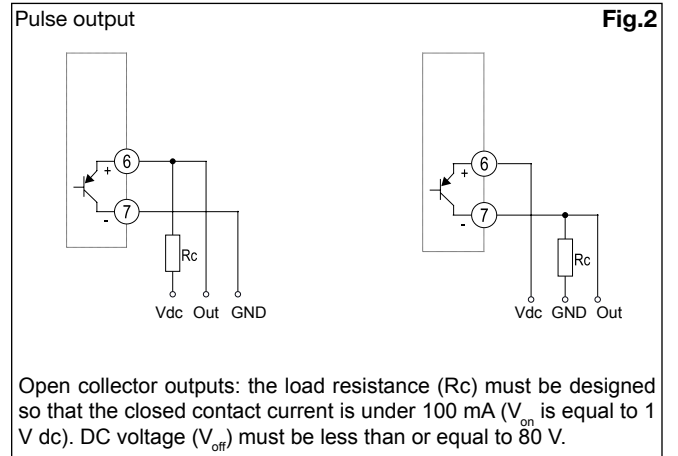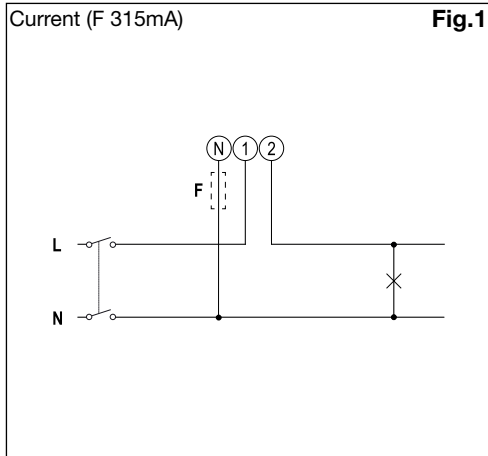

Front panel description

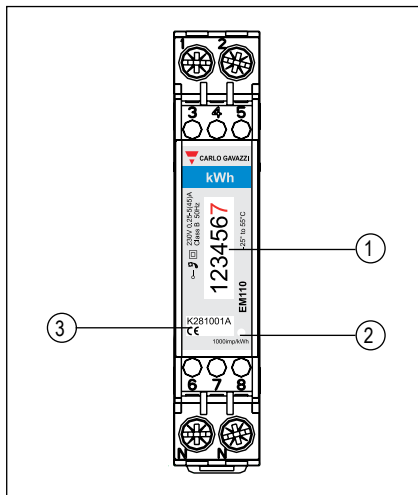

1. **Display**
Electro-mechanical type with total kWh indication
2. **LED**
LED proportional to kWh reading
3. **Serial number**
Area reserved to serial number

Dimensions

